


UNIQUE LIGHTING SYSTEMS 20 05



UNIQUE LIGHTING SYSTEMS

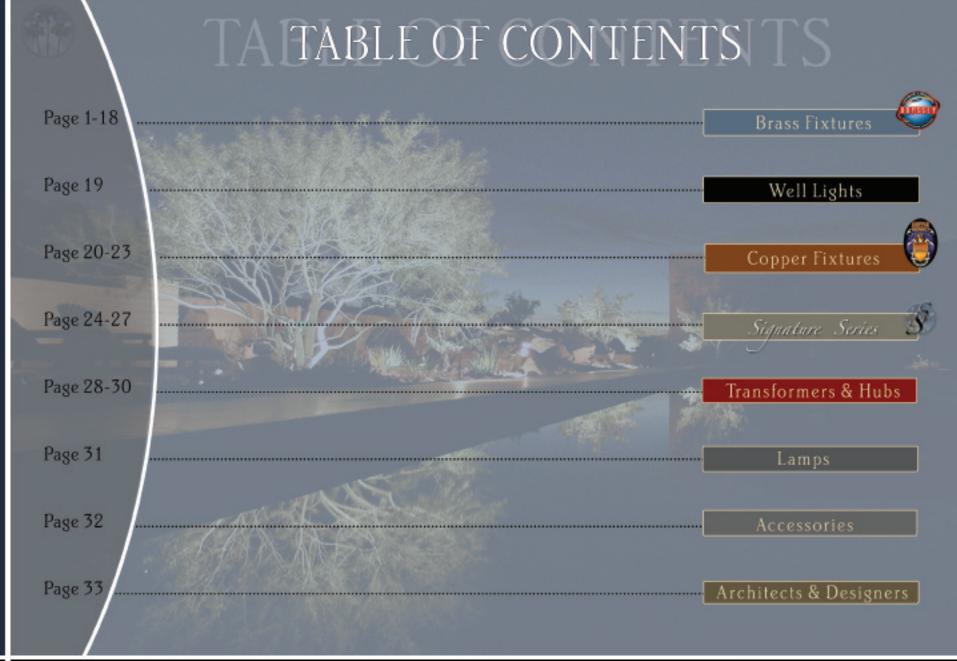

Unique Exclusive What is the Consumer Buyer Protection Plan?

The Consumer Buyer Protection Plan is a simple, yet thoroughly drafted plan for the installer to follow, guaranteeing "Zero Call Backs". The CBPP ensures the integrity of the lighting system.

Zero Call Backs

If an installer uses Unique Lighting Systems products for the complete lighting system (transformer, fixtures and hub), we are able to warranty the system against corrosion, wicking, oxidation and polarity issues.

Full Varranty

Since we are unable to warranty workmanship, the CBPP serves as a check system to ensure your contractor is installing your system correctly. The key is the Verification Forms; the installer must perform three critical functions to ensure Unique Lighting Systems and the client:

No overloads, No shorts, 11.5 volts to the lamps, Not to be over-volted, Not to be under-volted, No blown fuses, The perfect installation and Zero call backs.

Integrity

Here's how it works....

Step 1. The installer must fill out the supplied Verification Forms. This means they must check the primary amps on the transformer with an amp probe, make sure there are no more than 16 amps on the secondary side and there are 12 volts to the Satellite Hub.

Step 2. The installer must complete the Lamp Replacement Chart,

Step 3. The installer must complete the As-Built.

When the installer has completed this thorough inspection process, Unique Lighting Systems can warranty the system FOR LIFE.



Consumer Buyer Protection Plan



The System

The Unique Lighting Power Management Hub System

LIFETIME WARRANTY (ON THE ENTIRE SYSTEM) ...

Unique is the ONLY manufacturer that will warranty the fixtures, the wire connections, and the transformer, essentially the entire system, for life! This one of a kind lifetime warranty protects homeowners not only against rust and corrosion of the fixtures, but also the sockets, all related hardware, wire connections and the solid brass construction. Working harder and smarter, we continue to manufacture the most innovative and

longest lasting landscape lighting products.

Satellite Hub

Step 1

The Multimatic Power Transformer

- Independent voltage taps (ranging from 12 to 22 volts)
- Compensates for voltage drop from transformer to hub

Homerun #12/2 wire

 Delivers proper voltage to each hub with the ability to have multiple hubs

Step 2

The Satellite Hub

- Distributes proper voltage evenly a to every lamp
- Eliminates wire connections below 9 ground
- Secondary fusing at the hub allows fuse sizing according to load or wire size
 - Makes installation easier and more so

Step 3

The Fixtures

- Completes the system
- Pre-wired, 25 or 50 feet, #16-2 wire lead
- · Eliminates the need for sealed wire nuts
- All connections are above ground or sealed within the Satellite Hub housing


Constellation

Mercury 7







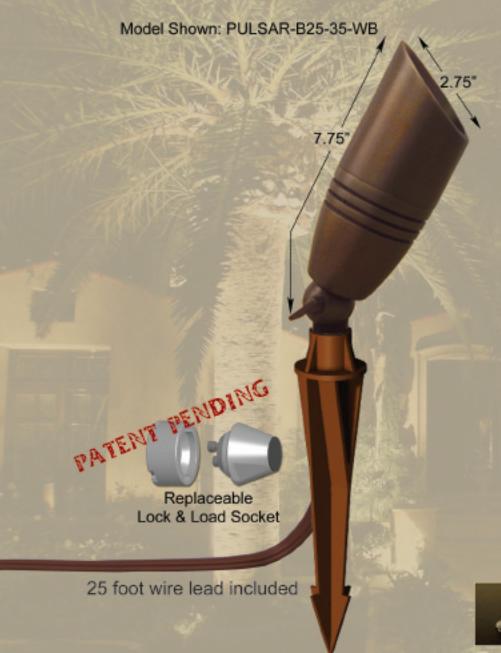

PULSAR CAST BRASS MR-16 BULLET UP LIGHT

- Construction: Cast Brass with Aircraft Quality Double Silicon "O" Rings
- Shroud: Lock and Load, 360 Rotation, 8 Settings
- Socket: Replaceable Lock & Load Socket (pre-greased)
- Knuckle: Cast Brass, Adjustable
- Finish Coat: Poly-Thermal Shield
- Wire: 25 Feet, 16/2 THW UV Brown
- Stake: Brown PVC Gravity Stake
- Weight: 2.3 lbs.
- Level of Light Application: 1, 2 & 3
- Lamp: 35 Watt MR-16 FMW, 4,000 hr. Rating
- Maximum Wattage: 35 Watts
- Lifetime Warranty
- Patented

LENSES INCLUDED







Lens



De-Op Lens

(Frosted)



Lens

(Spread)

Ax-Op

Lens

(Linear Spread)





Louver Retainer Clip



Natural Brass



Tucson Tan







Verde Green

Custom Colors available upon request. Please inquire about lead times

Model Shown: PROBE-OBM-B25-35-WB



For Down Lighting

PROBE CAST BRASS MR-16 BULLET UP LIGHT

- Construction: Cast Brass with Aircraft Quality Double Silicon "O" Rings
- Socket: Replaceable Lock & Load Socket (pre-greased)
- Knuckle: Ball and Joint, 360 Orbital Mount
- Finish Coat: Poly-Thermal Shield
- Stake: Brown PVC Gravity Stake
- Shroud: Lock and Load, 360 Rotation
- Weight: 1.7 lbs.
- Wire: 25 Feet, 16/2 THW UV Brown
- Level of Light Application: 1, 2 & 3
- Lamp: 35 Watt MR-16 FMW, 4,000 hr. Rating
- Maximum Wattage: 35 Watts
- Lifetime Warranty

LENSES INCLUDED



2.5"











MR-16

Convex Lens

De-Op Lens

Vi-Op Lens

Ax-Op Lens

Hex Louver

Retainer Clip

(Frosted) (Spread) (Linear Spread)













Custom Colors available upon request. Please inquire about lead times

Model Shown: BIGBANG-B25-35-WB 5.1 8.5" PENDING Rubber Gasket Lens Holder 25 foot wire lead included

BIG BANG CAST BRASS PAR 36 DIRECTIONAL UP LIGHT

- Construction: Cast Brass
- Knuckle: Cast Brass, Adjustable
- Shroud: Lock and Load, 360° Rotation
- Finish Coat: Poly-Thermal Shield
- Stake: Brown PVC Stabilizer Stake
- Weight: 4.67 lbs.
- Wire: 25 Feet, 16/2 THW UV Brown
- Level of Light Application: 1, 2 & 3
- Lamp: 35 Watt PAR 36 WF Halogen, 4,000 hr. Rating
- Maximum Wattage: 50 Watts
- Lifetime Warranty

LENSES INCLUDED







Vi-Op Lens







Lens (Spread) (Linear Spread)

Hex Louver







White





STARBURST CAST BRASS DIRECTIONAL WALL WASHER Model Shown: STARBURST-B25-35-WB (Shown with front mounted MR-16 FMW) 5.25" Construction: Cast Brass Socket: Replaceable Lock & Load with DUAL 5.9" Lock & Load Function. Front mount MR-16 or Side Mount Astro-Brite (pre-greased) Knuckle: Cast Brass Adjustable Finish Coat: Poly-Thermal Shield 8.48" Stake: Brown PVC Stabilizer Stake PATENT TENDING Weight: 4.1 lbs. Wire: 25 Feet, 16/2 THW UV Brown Level of Light Application: 1, 2 & 3 Rubber Gasket Lamp: 35 Watt MR-16 FMW, 4,000 hr.Rating or Lens Holder 35 Watt Astro-Brite, 5,000 hr. Rating. (Both Included) PATENT PENDING Maximum Wattage: 35 Watts Lifetime Warranty LENSES INCLUDED Replaceable Lock & Load Socket Both Included Vi-Op Clear De-Op Ax-Op Lens MR-16 Astro-Brite Lens Lens (Frosted) (Spread) (Linear Spread) 25 foot wire lead included White

Model Shown: STELLAR-B25-20-WB 3.99"-4.78" 2.0" PATENT PENDING Rubber Gasket Lens Holder 25 foot wire lead included

STELLAR CAST BRASS MINI WALL WASHER

- Construction: Cast Brass
- Socket: Stainless Steel (pre-greased)
- Knuckle: Cast Brass Adjustable
- Finish Coat: Poly-Thermal Shield
- Stake: Brown PVC Gravity Stake
- Weight: 1.2 lbs.
- Wire: 25 Feet, 16/2 THW UV Brown
- Level of Light Application: 1, 2 & 3
- Lamp: 20 Watt Astro-Brite, 10,000 hr. Rating
- Maximum Wattage: 20 Watts
- Lifetime Warranty

LENSES INCLUDED



Astro-Brite



Clear





De-Op Lens

Ax-Op Lens (Linear Spread)














Custom Colors available upon request. Please inquire about lead times.

Model Shown: APOLLO-B25-35-BK

Shown with optional commercial grade brass grate.

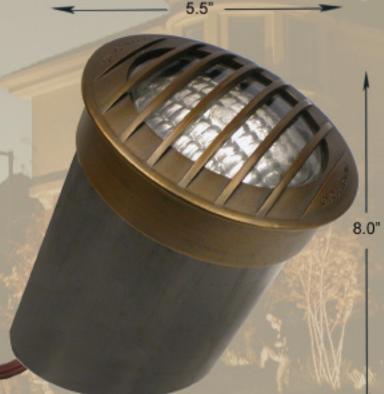

25 foot wire lead included



Optional Eclipse Glare Shield Available.



Brass Debris Guard Comes Standard.

APOLLO WELL LIGHT

- Construction: ABS Composite & Brass
- Housing: ABS Composite
- Debris Guard: Brass Ring with Clear Glass
- Weight: 1.95 lbs.
- Wire: 25 Feet, 16/2 THW UV Brown
- Level of Light Application: 1, 2 & 3
- Lamp: 35 Watt PAR 36, 4,000 hr. Rating
- Maximum Wattage: 50 Watts
- Lifetime Warranty

LENSES INCLUDED



PAR 36



De-Op Lens



Ax-Op



(Frosted)

Vi-Op Lens (Spread) (Linear Spread)

Lens

Hex Louver



Black Housing



Weathered Brass Debris Guard ABS Grate Included.



Adjustable Stainless Steel Gimble Ring

NOVA CAST BRASS MR-16 WELL LIGHT

Model shown: NOVA-B25-20-WB

25 foot wire lead included



- Construction: Cast Brass
- Socket: Stainless Steel (pre-greased)
- Finish Coat: Poly-Thermal Shield
- Shroud: Cast Brass, Included
- Weight: 1.55 lbs.
- Wire: 25 Feet, 16/2 THW UV Brown
- Level of Light Application: 1, 2 & 3
- Lamp: 20 Watt MR-16 BAB, 4,000 hr. Rating
- Maximum Wattage: 20 Watts
- Lifetime Warranty

LENSES INCLUDED



MR-16



Lens



Ax-Op Lens







Vi-Op Lens

Hex Louver (Linear Spread)

Domed De-Op







Cast Brass Shroud Included

Model Shown: LUNAR-B25-35-WB

LUNAR & QUASAR1 CAST BRASS DOWN LIGHTS

- Construction: Cast Brass with Aircraft Quality Silicon "O" Rings
- Socket: Replaceable Lock & Load Socket (pre-greased)
- Knuckle: Ball & Joint, 360
 Orbital Mount
- Mounting: Stratosphere Bracket
- Finish Coat: Poly-Thermal Shield
- Shroud: Lock & Load 360°Rotation, MR-16 Recessed. Lunar, Extra Long to Eliminate Glare
- Weight: Lunar: 2.34 lbs. Quasar1: 1.91 lbs.
- Wire: 25 Feet, 16/2 THW UV Brown
- Level of Light Application: 1, 2 & 3
- Lamp: 35 Watt MR-16 FMW, 4,000 hr. Rating
- Maximum Wattage: 35 Watts
- Lifetime Warranty

LENSES INCLUDED











MR-16

De-Op Lens (Frosted)

Vi-Op Lens

Ax-Op Lens (Spread) (Linear Spread)

Hex Louver

Blue Lens



Weathered Brass

Natural Brass




White





360° Rotatable Orbiltal Mount





Stratosphere Mounting Bracket



Replaceable Lock & Load Socket

2.3"_

QUASAR1 shroud approx. 2" shorter

Model Shown: QUASAR2-B25-35-WB

5.5 25 foot wire lead included

Quasar 2 BRASS DOWN LIGHT

- Construction: Brass
- Socket: Stainless Steel (pre-greased)
- Knuckle: Brass Locking Adjustment Screws
- Mounting: Surface Mount with J-Box
- Finish Coat: Poly-Thermal Shield
- Shield: Glare Shield Included
- Weight: 1.0 lbs.
- Wire: 25 Feet, 16/2 THW UV Brown, White
- Level of Light Application: 1, 2 & 3
- Lamp: 35 Watt MR-16 FMW, 4,000 hr. Rating
- Maximum Wattage: 35 Watts
- Lifetime Warranty

LENSES INCLUDED



MR-16



De-Op Vi-Op (Frosted)






Hex







Blue

Lens Retainer Clip













Custom Colors available upon request. Please inquire about lead times.

Model Shown: COMET-B25-20-WB PATENT PENDING 25 foot wire lead included 360° Rotatable Orbital Mount 3 Foot Hanging Chain Included

COMET MINI DOWN LIGHT/HANGING LIGHT

- Construction: Solid Brass with Aircraft Quality "O" Rings
- Socket: Stainless Steel (pre-greased)
- Knuckle: Ball and Joint, 360
 Obrbital Mount
- Mounting: Stratosphere Bracket, Hanging Chain
- Finish Coat: Poly-Thermal Shield
- Weight: 1.1 lbs.
- Wire: 25 feet, 16/2 THW UV Brown
- Level of Light Application: 1, 2 & 3
- Lamp: 20 Watt MR-11, 3,000 hr. Rating
- Maximum Wattage: 20 Watts
- Lifetime Warranty

LENSES INCLUDED













De-Op

Vi-Op Lens

Ax-Op Lens (Spread) (Linear Spread)

Hex Louver

Blue Lens



Weathered Brass Natural Brass





White





Verde Green

Custom Colors available upon request. Please inquire about lead times.

2.2"



MERCURY 7 & 4 BRASS AREA/PATH LIGHTS


- Construction: Spun Brass
- Socket: Stainless Steel (pre-greased)
- Height: 3 Adjustable Height Settings
- Finish Coat: Poly-Thermal Shield
- Stake: Brown PVC Stabilizer Stake
- Weight: 1.5 lbs.
- Wire: 50 Feet, 18/2 THW UV Brown
- Level of Light Application: 1 & 2
- Lamp: 20 Watt Astro-Brite, 10,000 hr. Rating
- Maximum Wattage: 20 Watts
- Lifetime Warranty























JUPITER & SOLARIS BRASS AREA/PATH LIGHTS



- Construction: Spun Brass
- Shroud: Fully Adjustable, Articulating, 360 rotation (Solaris)
- Knuckle: Solid Machined Brass, Adjustable (Solaris)
- Socket: Stainless Steel (pre-greased)
- Finish Coat: Poly-Thermal Shield
- Stake: Brown PVC Stabilizer Stake
- Weight: 2.0 lbs.
- Wire: 50 Feet, 18/2 THW UV Brown
- Level of Light Application: 1, 2 & 3
- Lamp: 20 Watt Astro-Bite, 10,000 hr. Rating
- Maximum Wattage: 20 Watts
- Lifetime Warranty
- Patent Pending (Solaris)



Astro-Brite



Clear Lens



De-Op Lens (Frosted)



De-Op (Solaris Only)

Lens (Frosted)















Custom Colors available upon request. Please inquire about lead times.


CONSTELLATION & SATURN BRASS AREA/PATH LIGHTS Construction: Spun Brass, Machined Natural Brass Collar (Saturn) Socket: Stainless Steel (pre-greased) Height: 3 Adjustable Height Settings Finish Coat: Poly- Thermal Shield Stake: Brown PVC Stabilizer Stake 23.0" Weight: Constellation: 1.85 lbs. Saturn: 1.90 lbs. 23.0" Wire: 50 Feet, 18/2 THW UV Brown Level of Light Application: 1 & 2 Lamp: 20 Watt Astro-Brite, 10,000 hr. Rating Maximum Wattage: 20 Watts Lifetime Warranty 50 foot wire lead included De-Op Lens Astro-Brite (Frosted) Model Shown: CONSTELLATION-B50-20-WB White Model Shown: SATURN-B50-20-WB Custom Colors available upon request. Please inquire about lead times.



VOYAGER 8 & 5 BRASS STEP LIGHTS



Voyager 8 uses (2) 20 Watt Astro-Brite bulbs (supplied)

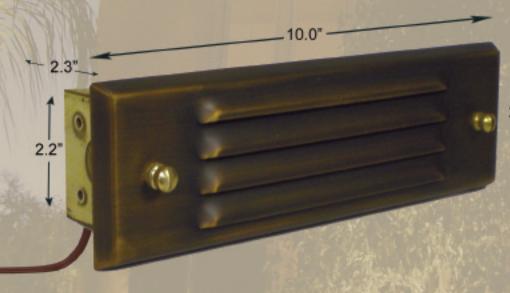

- 2.5*
 2.5*
 2.2*
 25 foot wire lead included
 2.3*
 - Model Shown: VOYAGER5-B25-20-WB

- Construction: Brass
- Housing: Natural Brass/Box
- Socket: Stainless Steel (pre-greased)
- Mounting: Flush Mount
- 2.9" Finish Coat: Poly-Termal Shield
 - Weight: Voyager5: .831 lbs. Voyager8: 1.15 lbs.
 - Wire: 25 Feet, 16/2 THW UV Brown
 - Level of Light Application: 2
 - Lamp: 20 Watt Astro-Brite, 10,000 hr. Rating
 - Maximum Wattage: 40 Watts (V8) 20 Watts (V5)
 - Lifetime Warranty

Louver and Wire cover included







De-Op Lens Included














WB Weathered Brass


NB Natural Bras

TT Tucson Tan

Model shown: GEMINI-B25-20-WB

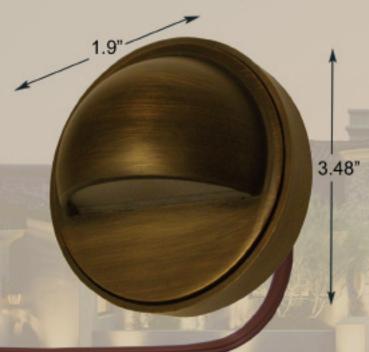

Model shown: VIKING-B25-20-WB



25 foot wire lead included

GEMINI & VIKING CAST BRASS NICHE LIGHTS

- Construction: Cast Brass
- Socket: Stainless Steel (pre-greased)
- Mounting: Surface Mount
- Shroud: Lock and Load
- Finish Coat: Poly-Thermal Shield
- Weight: 1.2 lbs.
- Wire: 25 Feet, 16/2 THW UV Brown, White
- Level of Light Application: 1 & 2
- Lamp: 20 Watt Astro-Brite, 10,000 hr. Rating
- Maximum Wattage: 20 Watts
- Lifetime Warranty





Astro-Brite





De-OP Lens Included (Frosted)













Model Shown: ORION12-B0-0-WB

12.0"

Notes:

Orion 4 - 12V Includes 1-20W Lamp

Orion 6 - 12V Includes 2-20W Lamps Up/Down

Orion 9 - 120V No Lamp Supplied

Orion 12 - 120V No Lamp Supplied

ORION SERIES BRASS WALL SCONCE

- Construction: Brass
- Socket: Stainless Steel (pre-greased)
- Mounting: Surface Mount
- Finish Coat: Poly-Thermal Shield
- Weight: Orion 4: .750 lbs.
 Orion 6: .850 lbs.
 Orion 9: 1.94 lbs.
 Orion 12: 3.30 lbs.
- Wire: 25 Feet 16/2 THW UV Brown, White (Orion 4 & 6 Only)
- Level of Light Application: 1, 2 & 3
- Lamp: 20 Watt Astro-Brite, 10,000 hr. Rating (Orion 4 & 6 Only)
- Maximum Wattage: 20 Watts (Orion 4 & 6 Only)
- Lifetime Warranty



Astro-Brite (Orion 4 & 6 Only)



De-OP Lens Included (Frosted)



_ N



TT








Custom Colors available upon request. Please inquire about lead times



F225 & F125 WELL LIGHT

- Construction: ABS Composite (F225) PVC Composite (F125)
- Debris Guard: PVC Composite (F125)
- Weight: F225: 1.4 lbs. F125: 1.3lbs.
- Wire: 25 Feet 16/2 THW UV Brown
- Level of Light Application: 1, 2 & 3
- Lamp: 35 Watt PAR 36 WF Halogen, 4,000 hr. Rating
- Maximum Wattage: F125: 35 Watts F225: 50 Watts
- Lifetime Warranty







Commercial Grade Brass Grate Optional with F225.




PAR 36







GUARDIAN & CRUSADER NATURAL COPPER MR-16 BULLET LIGHTS

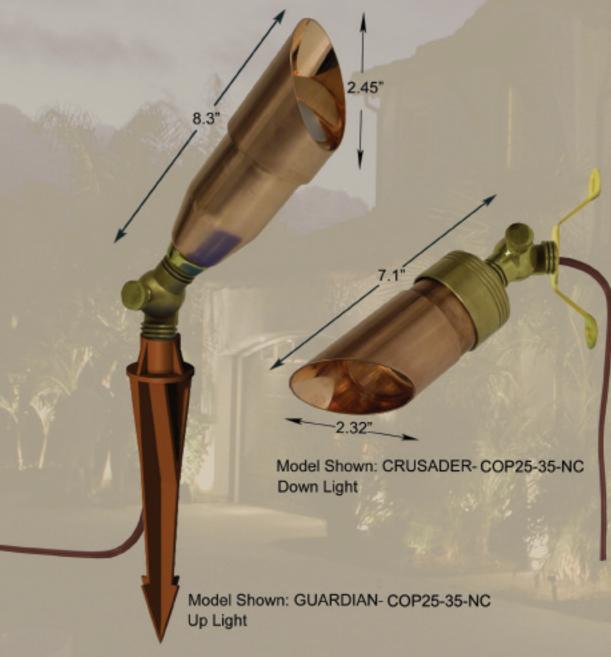

- Construction: Natural Copper Housing with Cast Brass Base
- Socket: Stainless Steel (pre-greased)
- Mounting: Brass, Mounting Bracket for Crusader (shown)
- Finish Coat: Natural Copper
- Stake: Brown PVC Gravity Stake (Guardian)
- Weight: 1.55 lbs. (Guard.) & 1.4lbs. (Crus.)
- Wire: 25 Feet, 16/2 THW UV Brown
- Level of Light Application: 1, 2 & 3
- Maximum Wattage: 35 Watts
- 9 15 Year Warranty



MR-16



Clear Convex Lens (Guardian Only)



NC



Tan.



VG

25 foot wire lead included

WINDSOR & CANTERBURY NATURAL COPPER WALL WASHER & AREA/PATH LIGHT



- Construction: Natural Copper Housing, with Machined Brass Knuckle
- Socket: Stainless Steel (pre-greased)
- Mounting: Integrated Strengthening Support Bushing
- Shroud: Fully Adjustable, Articulating, 360 Rotation
- Finish Coat: Natural Copper
- Stake: Brown PVC Stabilizer Stake
- Weight: Wind.: 1.65 lbs. Cant.: 2.15 lbs.
- Wire: 25 Feet, 18/2 THW UV Brown
- Level of Light Application: 1 & 2
- Lamp: 20 Watt Astro-Brite, 10,000 hr. Rating
- Maximum Wattage: 20 Watts
- 9 15 Year Warranty
- Patent Pending



Astro-Brite









Model Shown: CANTERBURY-COP25-20-NC

Model Shown: Illuminator4-COP25-20-NC

Model Shown: Illuminator6-COP25-20-NC ILLUMINATOR 6 & 4 NATURAL COPPER AREA/PATH LIGHTS 6.25" Rotating Height Adjustment Construction: Natural Copper Housing with Brass Collar 3.5" Socket: Stainless Steel (pre-greased) Height: Rotating Height Adjustment Finish Coat: Natural Copper Stake: Brown PVC Molded Stabilizer Stake 19.65" Weight: 2.5 lbs. (I6) & 1.65 lbs. (I4) 19.65" Wire: 25 Feet, 18/2 THW UV Brown Level of Light Application: 1 & 2 Lamp: 20 Watt Astro-Brite, 10,000 hr. Rating Maximum Wattage: 20 Watts 15 Year Warranty Patent Pending 25 foot wire lead included De-Op Lens (Frosted) Astro-Brite


-22-

Natural Copper Tucson Tan



CAMELOT NATURAL COPPER AREA/PATH LIGHT

- Construction: Natural Copper
- Socket: Stainless Steel (pre-greased)
- Height: 3 Adjustable Height Settings
- Finish Coat: Natural Copper
- Stake: Brown PVC Molded Stabilizer Stake
- Weight: 1.85 lbs.
- Wire: 25 Feet, 18/2 THW UV Brown
- Level of Light Application: 1 & 2
- Lamp: 20 Watt Astro-Brite, 10,000 hr. Rating
- Maximum Wattage: 20 Watts
- 15 Year Warranty



8.0"



Astro-Brite















Model Shown: CAMELOT-COP25-20-NC


25 foot wire lead included

23.0"



NAUTILUS MACHINED STAINLESS STEEL UNDERWATER LIGHT

Model Shown: NAUTILUS-S50-35-SS

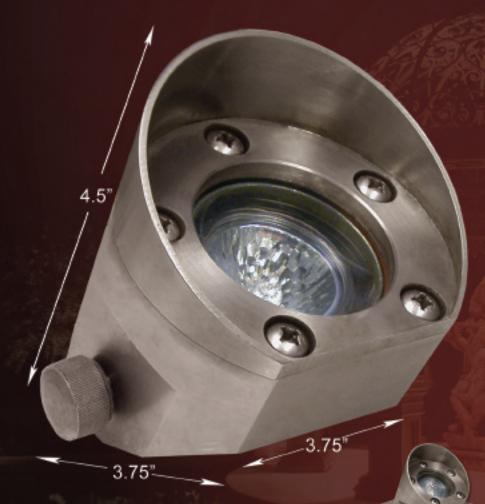

Safety tested in depths up to eight feet.

Pre-set angles for positioning: 45°

30 90° Shown with base plate

- Construction: Machined Stainless Steel (318)
 with Aircraft Quality Double Silicon "O" Rings
- Socket: Stainless Steel Spring (pre-greased)
- Knuckle: Large Locking Thumb Screw
- Finish Coat: Stainless Steel, Non-Toxic To Fish
- Mounting: 10" Stainless Steel 14 Guage Base
- Shroud: Stainless Steel
- Weight: 9.2 lbs.
- Wire: 50 Feet, 16/2 THW UV Brown
- Level of Light Application: 1, 2 & 3
- Lamp: 35 Watt MR-16 FMW, 4,000 hr. Rating
- Maximum Wattage: 50 Watts



MR-16



Lens



Domed De-Op

Lens Retainer

Lens (Frosted)



Stainless Steel



AUGUSTA PUTTING GREEN LIGHT

Model Shown: AUGUSTA-C50-20-WH

14







 Construction, Putting Green Light Enclusure: UV Stabilized Composite

Light Includes: Pin, Cup Housing & Fixture

Fixture Construction: Cast Brass

Socket: Stainless Steel (pre-greased)

Finish Coat: Poly-Thermal Shield

Weight: 3.05 lbs.

Wire: 50 Feet, 16/2 THW UV Brown

Level of Light Application: 1, 2 & 3

Lamp: 20 Watt MR-16 BAB, 4,000 hr. Rating

Maximum Wattage: 20 Watts

Lifetime Warranty

Patent Pending

UV stabilized composite cup housing surrounds the removable pin. Light is cast upward through housing giving off the perfect illumination for every putt.





MR-16





ENDEAVOUR BRASS BARBECUE/AREA LIGHT

Model Shown: ENDEAVOUR-B50-35-WB

14



Light up your whole cooking area, not just the grill. The Endeavour will enhance your whole entertaining area while illuminating your cooking surface, truly an Industry First! Construction: Solid Brass Housing With Machined Brass Collar

Socket: Stainless Steel (pre-greased)

Height: Rotating Adjustment Settings

Finish Coat: Poly-Thermal Shield

Weight: 6.0 lbs.

Wire: 50 Feet, 18/2 THW UV Brown

Level of Light Application: 1 & 2

Lamp: 35 Watt Astro-Brite, 5,000 hr. Rating

Maximum Wattage: 35 Watts

e Lifetime Warran



Astro-Brite



Lens (Frosted)













Custom colors available upon request. Please inquire about lead times

63.0"

Odyssey Transformer Series

The Powerstar

Removable, hinged door-

Each circuit is —— independently fused 🔊 Signature Series

-Snap in photocell ready

- Independant lugs for each homerun

Features and Benefits:

Industry first individually replaceable fuses on each run.

Brass can with weathered brass finish

Replaceable secondary circuit fusing

Removable photocell

Primary fuse protection

Digital timer ready/analog timer ready

Sequencer ready

Hinged, lockable door

110v wiring compartment

High temperature rating

PART NUMBER WATTS AVAILABLE TAPS

PS500WB	500 Watt	12, 13, 14, 15, 16 and 17 Volts
PS500WBPC	500 Watt	12, 13, 14, 15, 16 and 17 Volts
PS500WBT	500 Watt	12, 13, 14, 15, 16 and 17 Volts
PS500WBTPC	500 Watt	12, 13, 14, 15, 16 and 17 Volts
PS1120WB	1120 Watt	12, 13, 14, 15, 16, 18, 20 and 22 Volts
PS1120WBPC	1120 Watt	12, 13, 14, 15, 16, 18, 20 and 22 Volts
PS1120WBT	1120 Watt	12, 13, 14, 15, 16, 18, 20 and 22 Volts
PS1120WBTPC	1120 Watt	12, 13, 14, 15, 16, 18, 20 and 22 Volts

Dimensions:

15.25" high x 8.3" wide x 6.2" deep

Sizes: 1120, 840, 600, 500, 360

Transformers & Hubs

Removable, hinged door

Inverted Transformer Series The I-Force

The only upright transformer series in the industry

Hinged, latchable top

Large, wire chase compartment with removeable knockout plate

Snap in photocell read-

......

Replaceable secondary fusing

Features and Benefits:

Comfortable to install
Spacious lug for multiple connections
Replaceable secondary circuit fusing
Removable photocell
Primary fuse protection
Digital/analog timer ready
Sequencer ready

Large wire chase compartment

Hinged door
Lockable door
110v wiring compartment
Rain tight Stainless Steel
Smart mounting bracket
High temperature rating
Internal storage compartment holdsspare fuses and allen wrench

PART NUMBER	WATTS	AVAILABLE TAPS
IF360	360 Watt	12, 13, 14 and 15 Volts
IF500	500 Watt	12, 13, 14, 15, 16 and 17 Volts
IF600	600 Watt	12, 13, 14, 15, 16 and 17 Volts
IF840	840 Watt	12, 13, 14, 15, 16, 18, 19 and 20 Volts

Dimensions:

13.5" high x 7.5" wide x 8" deep

Please call for availability

LIFETIME WARRANTY ON ALL TRANSFORMERS INDUSTRY LEADER FOR OVER 10 YEARS



Direct Burial



Multimatic Power Transformer

Stainless Steel



Inverted Transformer

- . Secondary fusing included
- Inverted for easy access

DIRECT BURIAL TRANSFORMERS

PART NUMBER	WATTS	AVAILABLE TAPS
360DB	360 Watt	12, 13, 14 and 15 Volts
500DB	500 Watt	12, 13, 14, 15, 16 and 17 Volts
840DB	840 Watt	12, 13, 14, 15, 16, 18 and 20 Volts
1120DB	1120 Watt	12, 13, 14, 15, 16, 18, 20 and 22 Volts
300-24-DB	300 Watt	24, 25 and 26 Volts
500-24-DB	500 Watt	24, 25, 26, 27 and 28 Volts

AQUATIC TRANSFORMERS (pool, pond & water feature series)

30033531	360 Watt	12, 13, 14 and 15 Volts
360SSPSTPC	360 Watt	12, 13, 14 and 15 Volts
360SSPSTT	360 Watt	12, 13, 14 and 15 Volts
360SSPSTTPC	360 Watt	12, 13, 14 and 15 Volts
840SSPST	840 Watt	12, 13, 14, 15, 16, 18 and 20 Volts
840SSPSTPC	840 Watt	12, 13, 14, 15, 16, 18 and 20 Volts
840SSPSTT	840 Watt	12, 13, 14, 15, 16, 18 and 20 Volts
840SSPSTTPC	840 Watt	12, 13, 14, 15, 16, 18 and 20 Volts

I-FORCE INVERTED TRANSFORMERS

IF360	360 Watt	12, 13, 14 and 15 Volts
IF500	500 Watt	12, 13, 14, 15, 16 and 17 Volts
IF600	600 Watt	12, 13, 14, 15, 16 and 17 Volts
IF840	840 Watt	12, 13, 14, 15, 16, 18, 19 and 20 Volts.

POWERSTAR ODYSSEY TRANSFORMERS

PS500WB	500 Watt	12, 13, 14, 15, 16 and 17 Volts
PS500WBPC	500 Watt	12, 13, 14, 15, 16 and 17 Volts
PS500WBT	500 Watt	12, 13, 14, 15, 16 and 17 Volts
PS500WBTPC	500 Watt	12, 13, 14, 15, 16 and 17 Volts
PS1120WB	1120 Watt	12, 13, 14, 15, 16, 18, 20 and 22 Volts
PS1120WBPC	1120 Watt	12, 13, 14, 15, 16, 18, 20 and 22 Volts
PS1120WBT	1120 Watt	12, 13, 14, 15, 16, 18, 20 and 22 Volts
PS1120WBTPC	1120 Watt	12, 13, 14, 15, 16, 18, 20 and 22 Volts

MULTIMATIC POWER TRANSFORMERS

PART#	WATTS	TAPS AVAILABLE
300SS-SL	300 Watt	12 and 13 Volts
300SSPC-SL	300 Watt	12 and 13 Volts
300SST-SL	300 Watt	12 and 13 Volts
300SSTPC-SL	300 Watt	12 and 13 Volts
360SS-SL	360 Watt	12, 13, 14 and 15 Volts
360SSPC-SL		12, 13, 14 and 15 Volts
360SST-SL	360 Watt	12, 13, 14 and 15 Volts
360SSTPC-SL	360 Watt	12, 13, 14 and 15 Volts
500SS-SL	500 Watt	12, 13, 14, 15, 16 and 17 Volts
500SSPC-SL	500 Watt	12, 13, 14, 15, 16 and 17 Volts
500SST-SL	500 Watt	12, 13, 14, 15, 16 and 17 Volts
500SSTPC-SL		12, 13, 14, 15, 16 and 17 Volts
600SS-SL	600 Watt	12, 13, 14, 15, 16 and 17 Volts
600SSPC-SL		12, 13, 14, 15, 16 and 17 Volts
		12, 13, 14, 15, 16 and 17 Volts
		12, 13, 14, 15, 16 and 17 Volts
		12, 13, 14, 15, 16, 18, and 20 Volts
840SSPC-SL		12, 13, 14, 15, 16, 18, and 20 Volts
840SST-SL		12, 13, 14, 15, 16, 18, and 20 Volts
840SSTPC-SL		12, 13, 14, 15, 16, 18, and 20 Volts
		12, 13, 14, 15, 16, 18, 20 and 22 Volts
		12, 13, 14, 15, 16, 18, 20 and 22 Volts
1120SST-SL	1120 Watt	12, 13, 14, 15, 16, 18, 20 and 22 Volts
1120SSTPC-S	L1120 Watt	12, 13, 14, 15, 16, 18, 20 and 22 Volts

Other Transformers Available Upon Request

SS = Stainless Steel T = Timer PC = Photo Cell SL = Secondary Lugs WB = Weathered Brass

^{*} Wire Options Available

^{*} Call for availability

Transformers & Hubs

In addition to having the highest quality parts, you need to have an integrated system to create a lighting portrait. Inconsistent light output between fixtures is known to ruin most lighting portraits. For this reason Unique developed the Equalizer™ Hub Wiring System. Using the Multimatic Power Transformer, the Equalizer™ Hub Wiring System, and our top of the line fixtures, Unique has created the only system that produces even lighting output at every fixture. Unique Lighting fixtures come with a 25-foot wire lead that taps into the Equalizer™ Hub creating a simple, and maintenance-free lighting system!





The Equalizer™ wiring system has proven to be a breakthrough for landscape lighting. It allows you to receive equal voltage to every lamp every time! The Equalizer™ Hub ensures proper voltage distribution and can be used with one or more fixtures. It ensures no connections in the the ground and uses only two connections per wire run. The Equalizer™ Hub includes two barrel lugs with lithium greased caps. The black housing blends discreetly for above or below ground installation.

The Satellite™ Hub is the ultimate In-Line fuse protected wiring system. It allows you to size the fuse according to load or wire size. Unique includes a replaceable 20 amp fuse at the point of connection to make troubleshooting accessible, convenient and fast. The Satellite™ Hub ensures proper voltage distribution and can be used with one or more fixtures. The Satellite™ Hub includes three barrel lugs with lithium greased caps and a In-Line 20 amp fuse. The dark brown housing blends discreetly for above or below ground installation.





35 Watt MR-16



Unique Exclusive 35 Watt Astro-Brite



Unique Exclusive 20 Watt Astro-Brite



PAR 36

LONGEST LAMP LIFE AVAILABLE...

Two key items to consider before making your landscape lighting decision are lamp life and color of light emitted from the bulb. Being the innovator in the field, Unique uses lamps that produce the best illumination while lasting the longest period of time. All of Unique's Odyssey fixtures come with a high quality Halogen or Astro-Brite lamp that will last between 4,000 to 20,000 hours, giving you years of trouble-free operation. Most importantly, the lamps produce beautiful white light that preserves the natural color and aesthetics of your landscape and property.

EXCLUSIVE TO UNIQUE...

Astro-Brite lamps give adequate light levels with minimum energy usage, ensuring Level 1 light output onto hard surfaces. With it's up to 20,000 hour rating, the Astro-brite will out-last any other lamp. In addition, unlike halogen, the Astro-Brite is unaffected by the oils on your fingers. All bi-pin sockets are stainless steel to last a lifetime, along with being factory greased to prevent corrosion and pitting. It also incorporates an extra heavy-duty ceramic socket rated for 25 amps.

All components are replaceable.

Technical support at 1.800.955.4831





Lights that last a LIFETIME.



Digital Timer



"The Sequencer"



Snap in Photocell




Brass Lugnuts



Fuses



Amp Probe & Volt Meter



Commercial Grade Brass Grate



ABS Grate



Eclipse Glare Shield



Stabilizer Stake Gravity Stake



Lenses

UNIOUELLIGHTING SYSTEMS

JBOX-B-WB Solid Brass J-Box, weathered brass finish
JBOX-B-WH Solid Brass J-Box, white finish
APOLLODEBRIS Apollo Debris Guard with Clear Lens
APOLLOOPTWB Apollo Eclipse Glare Sheild
APDG-FRS De-Op Lens for Apollo Debris Guard
APDG-BRS De-Op Lens for Apollo Debris Guard
APDG-LNR Ax-Op Lens for Apollo Debris Guard
APDG-HNY Honeycomb Glare Lens for Apollo Debris Guard
APDG-BLUE Blue Lens for Big Bang (Diameter 4.312*)
MR16BLUE Blue Lens for MR 16 Lamp
MR11BLUE Blue Lens for MR 16 Lamp
In CLIP Lens Retainer Clip for MR 16 Lamp
In CLIP Lens Retainer Clip for MR 11 Lamp
GRAVITYSTAKE Gravity Stake (Color Brown)
STABILIZERST Stabilizer Stake (Color Brown)
NOVAOPTIONWB Nova Eclipse Glare Shield
F110-BK Extender Can for stacking of F100 and F125's
F225GRATE ABS Composite Grate for F225
F225CLEAR Clear Lens for F225 Grate
F225FROST De-Op Lens for F225 Grate
F225FROST De-Op Lens for F225 Grate
F225SPREAD Vi-Op Lens for F225 Grate
F225SPREAD Vi-Op Lens for F225 Grate
F15ALUM Aluminium Grate, Powder-coated for F100 and F125's
RG115-BK F100 and F125 Replacement Grate, black
RG115-BF F100 and F125 Replacement Grate, black
RG115-BF F100 and F125 Replacement Rubber Gimble Ring, black
RR120-BK F100 and F125 Replacement Rubber Gimble Ring, black



Super Demo Kit

OX Oxquard Connection Grease 8 oz. Tube

LUG-NUT (30-322) Solid Brass threaded lug nut with black wire nut.

20 Amp Inline Fuse

TOOLKIT Tool Kit Volt Meter SUPERDEMOKIT Super Demo Kit, 1-840 Transformer, 12 Well Lights,
4 Odyssey Fixtures, Tape, Flags, Lamp Kit in aRolling Case.
Wired with Quick Connects for ease of use.
12DEMOCONN 2 Each Black and White Quick Connects with Contacts for #12 Wire
16DEMOCONN 2 Each Black and White Quick Connects with Contacts for #16 Wire Landscape Lighting Resource Manual - Workbook Bound Landscape Lighting Resource Manual - Hard Bound

4D-OP-Kit 1 Eclipse Glare Device and 3 Optical Lenses: Ax-Op, De-Op and Vi-Op



Resource Manuals

PC Photocell F4 4 Amp Fuse F5 5 Amp Fuse F6 6 Amp Fuse F8 8 Amp Fuse F10 10 Amp Fuse F10 10 Amp Fuse
F10-AUTOPACK 10 Amp Secondary Auto Spade Fuse Pack
F15-AUTOPACK 15 Amp Secondary Auto Spade Fuse Pack
F20-AUTOPACK 20 Amp Secondary Auto Spade Fuse Pack
RM-10-PC 10' Remote Photocell Kit (includes wire, 2 connectors and bell box)
RM-25-PC 25' Remote Photocell Kit (includes wire, 2 connectors and bell box)
SNPC Snap-In Photocell, SNPC-R Remote 15 foot Snap-In Photocell
DT-1 Digital Timer
INLINE Inline Fuse Holder with 20 Amp Fuse
SEQUENCER The "All On" module

-32-


Architects



Unique Lighting is dedicated to supporting Architects and Designers. With our Power Management System and superior lighting components, performance and versatility are guaranteed.

Our Consumer Buyer Protection Plan guarantees our system for a lifetime and ensures you that we stand behind our products.

Along with our Protection Plan, Unique Lighting provides technical assistance, design help and contractor referrals to ensure that your lighting portrait remains beautiful for a lifetime.

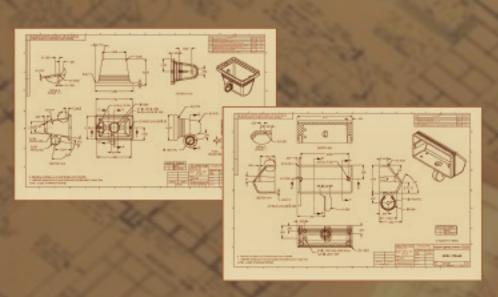




How To Order

To order the proper fixture out of this catalog use the following formula.

With the highest quality fixtures and transformers, along with our Lifetime Warranty and Consumer Buyer Protection Plan, Unique Lighting Systems is your best choice in low voltage lighting.

If you have any questions about our products or services, please feel free to call Unique Lighting Systems at 800.955.4831 or visit us on the web at www.uniquelighting.com.



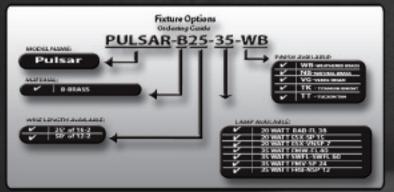

Please note that all Unique Lighting fixtures have a "Living Finish", and can be expected to vary in hue over time.

A Limited Warranty applies to all powder coated products.

ODYSSEY

Directional Down Lights

Lunar-B25-35-WB Quasar 1-B25-35-WB Quasar 2-B25-35-WB Comet-B25-20-WB

Directional Up Lights

BigBang-B25-35-WB Probe-OBM-B25-35-WB Probe-OSM-B25-35-WB Pulsar-B25-35-WB

Niche Lights

Gemini-B25-20-WB Observer-B25-20-WB Orbiter 1-B25-20-WB Orbiter 2-B25-20-WB Orion4-B25-20-WB Orion6-B25-20-WB Orion9-B0-0-WB Orion12-B0-0-WB Starburst-B25-35-WB Stellar-B25-20-WB Viking-B25-20-WB Voyager5-B25-20-WB Voyager8-B25-20-WB

Area/Path Lights

Jupiter-B50-20-WB Mercury 4-B50-20-WB Mercury 7-B50-20-WB Neptune-B50-20-WB Saturn-B50-20-WB Constellation-B50-20-WB Solaris-B50-20-WB Venus-B50-20-WB Centaurus4-B50-20-WB Centaurus6-B50-20-WB

In Ground Lights

Apollo-B25-35-BK Nova-B25-20WB

COPPER KNIGHTS

Directional Lights

Guardian-COP25-35-NC Crusader-COP25-35-NC

Area/Path Lights

Camelot-COP25-20-NC Illuminator6-COP25-20-NC Illuminator4-COP25-20-NC Canterbury-COP25-20-NC Windsor-COP25-20-NC

WELL LIGHTS

F100-BK F100-LB F125-BK F125-BK-BAG F125-LB F125-LB-BAG F150-BK F200-BK F225-BK-G F250-BK F125-BK-G F150-BK F125-BK-6PK F125-LB-6PK

F225-BK-6PK F225-BK-G-6PK





The Innovators of the Low Voltage Lighting Industry

- First to offer an Inverted transformer series
- FirstMulti-Tap 12-22 volt transformer
- First Equalizer Hub System
- First solid brass fixture to offer a Lifetime Warranty
- First to offer a 15 Year Warranty on copper fixtures
- First to offer 25 & 50 foot wire leads on fixtures
- First to offer lenses with each fixture
- First to offer encapsulated direct burial transformer
- First to offer a stainless steel transformer can
- First to offer a solid brass transformer can
- First to offer uniform fixture pricing
- First to offer a 2-day, in-the-field lighting training course (Unique University)
- First to offer a Lifetime Warranty on the entire system.

SUPERIOR MATERIALS...

In order to provide you with a lifetime warranty on our fixtures, Unique uses the best materials available to withstand rust and corrosion. However, please be aware that all, aluminum products will deteriorate over time from rust and corrosion due to the metal's properties. This is why we offer you Odyssey fixtures that are made from solid brass and Copper Knights fixtures made from solid copper with stainless steel lamp sockets. The solid brass construction can withstand the various elements associated with outdoor landscapes and it will last! Remember, it is not only how beautiful the finish is on the outside, but also what is underneath that counts. At Unique, lighting products are viewed as a lifetime investment!


APPROVED POWER SOURCES...

ALL of Unique's transformers have multiple ETL Listings that meet all UL Standards that make it the safest and most versatile power supply available. Whether you need to power-up fixtures near water, in a structure, in the landscape or on the home. Unique's Multimatic Power Transformers are approved for all outdoor low voltage lighting applications.

Cover Credits: Front-John Pfeiffer Electric . Back-Randy Smith, 2004 Unique Lighting Systems Golden Pallet Award winner

Copyright 2005, Unique Lighting Systems, Escondido, CA 92029
All rights reserved. Images and text may not be reproduced in any form without the expressed consent of Unique Lighting Systems.

Innovative Lighting Solutions That Last A Lifetime

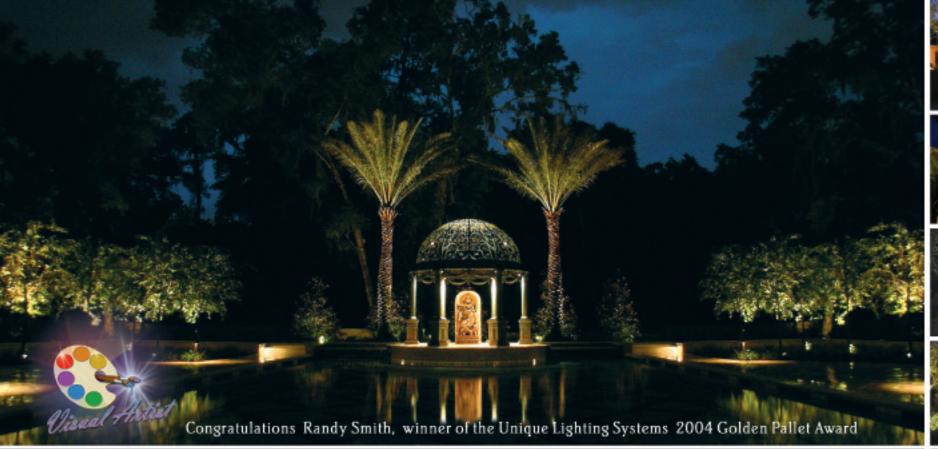









1240 Simpson Way Escondido, CA 92029 • Phone 800.955.4831 • Fax 760.740.0977 • www.uniquelighting.com



